

PATENT APPLICATION

IN THE U.S. PATENT AND TRADEMARK OFFICE

November 29, 2004

Applicant(s): Simon FENNEY et al.  
For : EFFICIENT BUMP MAPPING USING HEIGHT MAPS  
  
Serial No. : 10/611 719 , Group: 2673  
Confirmation No.: 6086  
Filed : July 01, 2003 Examiner: Unknown  
International Application No. : N/A  
International Filing Date : N/A  
Atty. Docket No.: R&G C-359

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

PRIORITY DOCUMENT TRANSMITTAL, AND CLAIM OF PRIORITY


Sir:

Applicant(s) hereby claim(s) the right of priority based  
on United Kingdom Serial No. 0308737.6, filed April 15, 2003.

Enclosed are:

- [X] A certified copy of the priority application in  
support of the claim of priority.
- [X] Acknowledgment Postal Card.

Respectfully submitted,

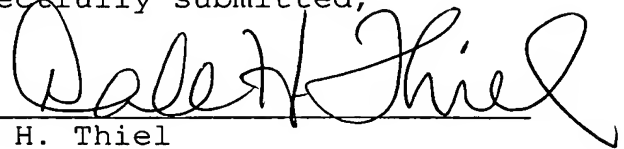

Dale H. Thiel

DHT/jp

FLYNN, THIEL, BOUTELL  
& TANIS, P.C.  
2026 Rambling Road  
Kalamazoo, MI 49008-1631  
Phone: (269) 381-1156  
Fax: (269) 381-5465

Dale H. Thiel	Reg. No. 24 323
David G. Boutell	Reg. No. 25 072
Ronald J. Tanis	Reg. No. 22 724
Terryence F. Chapman	Reg. No. 32 549
Mark L. Maki	Reg. No. 36 589
Liane L. Churney	Reg. No. 40 694
Brian R. Tumm	Reg. No. 36 328
Steven R. Thiel	Reg. No. 53 685
Donald J. Wallace	Reg. No. 43 977
Sidney B. Williams, Jr.	Reg. No. 24 949

Encl: Listed above

**BEST AVAILABLE COPY**

**THIS PAGE BLANK (USPTO)**



Serial Number 10/611 719  
Confirmation Number 6086  
Group 2673



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C. or PLC.

Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 1 June 2004

CERTIFIED COPY OF  
PRIORITY DOCUMENT

**THIS PAGE BLANK (USPTO)**

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)



The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

Fee: £0

1. Your reference

AJR/46063, f601

2. Patent application number

(The Patent Office will fill in this part)

0308737.6

3. Full name, address and postcode of the or of each applicant (underline all surnames)

IMAGINATION TECHNOLOGIES LIMITED  
Home Park Estate  
Kings Langley  
Hertfordshire WD4 8LZ  
UNITED KINGDOM

Patents ADP number (*if you know it*)

7743180001

If the applicant is a corporate body, give the country/state of incorporation

UNITED KINGDOM

4. Title of the invention

Efficient Bump Mapping using Height Map

5. Full name, address and postcode in the United Kingdom to which all correspondence relating to this form and translation should be sent

Reddie & Grose  
16 Theobalds Road  
LONDON  
WC1X 8PL

Patents ADP number (*if you know it*)

91001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application  
(*If you know it*)

Date of filing  
(*day/month/year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day/month/year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description

16

Claim(s)

4

Abstract

Drawing(s)

7



7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

1

Request for substantive examination (*Patents Form 10/77*)

1

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

15 April 2003



12. Name and daytime telephone number of person to contact in the United Kingdom

A J ROBSON  
020-7242 0901

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

## Efficient Bump Mapping using Height Maps

This invention relates to a method and apparatus for generating bump map data for use in a 3 dimensional computer graphics system.

### **Background to the Invention**

In the field of 3D computer graphics, detail is often added to otherwise smooth objects through the use of Bump Mapping, which was introduced by Blinn in his paper "*Simulation of Wrinkled Surfaces*" (SIGGRAPH 1978, pp286-292). This operates by perturbing, on a pixel-by-pixel basis, an object's otherwise 'smoothly' varying surface normal vector. Because the surface's normal vector is used when computing the shading of that surface, its modification can give the appearance of bumps. Figure 1 shows a surface normal being perturbed.

In Blinn's technique, each perturbation is computed by first taking derivatives of a bump displacement texture or 'height map' and subsequently applying it to the original surface normal and surface tangent vectors. The height map is a simple array of scalar values that gives the 'vertical' displacement or 'height' of a surface at regular grid points relative to that surface. Typically these are represented by monochromatic image data, e.g. a bitmap, with the brightness of any pixel being representative of the 'height' at that point. Standard texture mapping practices are used to access the height data. The normal perturbations and lighting calculations are done in global or model space. Figure 8a shows the application of Blinn's method to an 'illuminated' flat surface.

A more 'hardware friendly' method was later developed by Peercy et al ("Efficient Bump Mapping Hardware", SIGGRAPH 1997, pp 303-306, (also US patent 5,949,424)). This directly stores perturbed surface normals in a texture map, often called a *normal map*. Unlike Blinn's method, these normals are defined in a local tangential coordinate space, which can be likened to the representation of parts of the earth's surface on a page in an atlas. In Peercy's technique, the lights used for shading are also transformed into this tangential space and thus the shading calculations are also computed locally. This process significantly reduces the number of calculations required when using bump mapping. It has become popular in recent 3D hardware systems and is sometimes known as 'Dot3 bump mapping'.

To minimize the texture memory and, more importantly, memory bandwidth required by this procedure, it is desirable to compress the normal maps. Unfortunately many of the commonly used texture compression schemes are not suitable as they cause a loss of information that, when applied to the special case of normal maps, can cause an unacceptable degradation in image quality. Two methods that are specifically tailored to normal maps, however, are described in our International patent application No. WO9909523 - these typically still use 16 bits to represent each surface normal.

This then leaves the task of generating the normal map. One popular method again uses an initial height map, as originally described by Blinn. From that height map, a normal map can then be pre-computed, prior to rendering, by taking the cross product of the local derivative vectors of the height function sampled at regular positions. For cases where texture filtering is required, e.g. those based on the



well-known MIP mapping techniques, the height map should be repeatedly down-sampled and the associated normal map re-generated to produce the multiple MIP map levels. Problems can arise, however, when applying the texture filtering techniques, e.g. bilinear or trilinear filtering, to normal maps.

It should be noted that whereas the height map could be of relatively low precision - often as low as, say 8 or even 4 bits per pixel - the normal map may require 16 to 32 bits per pixel. The pre-processing steps of generating and compressing the normal map and the process of using the compressed normal map in 3D rendering are shown in Figure 2. In the generation phase a height map 2 is used for normal map generation 4. An optional compression step 6 may then be used to produce an output map 8. In the use of the map 8, an optional decompression step is first performed on-the-fly before the map is used by shading calculations 12 to provide pixel data to an output frame buffer 14.

Also well known in the art is the aspect of texture filtering, primarily the application of bilinear or trilinear filtering, the latter as invented by Williams ("Pyramidal Parametrics", Lance Williams, Computer Graphics, Vol. 7, No. 3, July 1983, pp 1-11). Bilinear filtering is briefly discussed below, since trilinear filtering is just the blending of two bilinear operations.

A 2D texture can be considered to be a vector function of 2 variables (U, V). For simplicity in this discussion, we will assume that, for an  $N \times N$  pixel texture, the values of U and V range from 0 to N. When bilinear filtering is applied, the pixel, or 'texel', values stored in the texture can be considered to be representative of the points in the centres of the respective texels, i.e. at coordinates  $(i+0.5,$

$j+0.5$ ), where  $i$  and  $j$  are integers and represent the texel coordinate of the particular texel. This is illustrated in figure 3 for texel  $(i,j)$ , the centre of which is indicated by '20'. At this point in the texture, bilinear filtering will return the colour of that texel. Similarly, sampling at locations '21', '22', and '23' will return the colours of texels  $(i+1,j)$ ,  $(i,j+1)$ , and  $(i+1,j+1)$  respectively. Now consider any sampling location within the square formed by '20', '21', '22', and '23', such as point '24'. Such a point has texture coordinates  $(u,v)$  where  $i+0.5 \leq u < i+1.5$  and  $j+0.5 \leq v < j+1.5$ . The texture values for any point in the square will be formed from a bilinear blend of the four surrounding texels.

In particular, the process used in the art will be some simple variation of the following:

```

U' := Us - 0.5; // Place stored texel value at centre of
texel
V' := Vs - 0.5;
Ui := floor(U');
Vi := floor(V');
Ublend := U' - Ui;
Vblend := V' - Vi;
// Do 2 horizontal linear blends
Colour0 := LinearBlend(Texel(Ui, Vi), Texel(Ui+1, Vi),
Ublend);
Colour1 := LinearBlend(Texel(Ui, Vi+1), Texel(Ui+1,
Vi+1), Vblend);
// Do 1 vertical linear blend
Result := LinearBlend(Colour0, Colour1, Vblend);

```

The Ublend and Vblend values are thus in the range  $[0..1)$ , and can be most conveniently represented by a fixed point number of, say, 8 to 16 bits precision.

Figure 4a shows hardware, typical in the art, that performs the first steps of the above bilinear algorithm. The requested sample position is input, '50', and the positions adjusted by  $\frac{1}{2}$  a texel, '51' via a subtraction. The 'floors' of the coordinate values are computed, '52', and these define the texel integer coordinates, '53', for the top left texel of the required set of 4 texels. The values are also subtracted, '54', from previous values to produce the blending factors for the bilinear operation, '55'.

It should be noted that the colours in 3D computer graphics are usually 4-D entities, having Red, Green, Blue, and Alpha (i.e. transparency) components. When the bilinear blending described above is performed, all four components of the various colour values are operated on in parallel. This is shown in the second stage of the bilinear operation in Figure 4b. The integer texel coordinates computed in '53', are used to access the four neighbouring texels, '60' thru '63'. Each of these has its own Red, Green, Blue, and Alpha components. In the example, there are four (usually identical) bilinear units, '65' thru '68', each of which computes one of the four colour channels using the blend factors, '55'. The individual scalar results are then recombined into the one resulting colour, '69'.

Another known aspect of 3D computer graphics is that of fitting smooth surfaces through or near a set of control points. In particular we are interested in two types known as uniform B-spline and Bezier splines, as described in literature such as "Computer Graphics. Principles and

Practice" (Foley et al) or "Curves and Surfaces for CAGD. A practical guide" (Farin).

Of particular interest to this application is the case of a bi-quadratic B-spline which has C1 continuity (i.e. continuous first derivative). A bi-quadratic B-spline also has the property that, for any point on the surface, a sub-grid of 3x3 control points is needed to evaluate that point and/or derivatives at that point. A one-dimensional slice through a section of a quadratic B-spline is shown in figure 5. The points, '80', '81', and '82' can be considered to be three adjacent control points in a row of the grid. The region of the curve between '85', and '86' depends only on these three control values (and the neighbouring 6 values in the 3x3 sub-grid in the case of a bi-quadratic surface).

One popular way of evaluating such a curve is to first convert it to the equivalent Bezier representation, i.e. a different set of 3 control points, and then apply the de Casteljau algorithm which uses repeated linear interpolation (see Farin). For the simple case of quadratic curves, this amounts to using a new set of control points which are '88', '81' (i.e., it is re-used), and '89'. Points '88' and '89' are just the mid points of the connecting line segments and could be found by simple averaging.

For the conversion of a bi-quadratic B-spline surface, the 3x3 grid of control points can be replaced by an equivalent set of 3x3 Bezier control points. An example showing the situation for a bi-quadratic surface is shown, in plan form, in figure 6. The original 9 B-spline control points, one example of which is shown by '100', are converted into the equivalent Bezier control points, such as '101'. Stating this more precisely, if the grid of 3x3 B-spline points are:

$$\begin{bmatrix} a & b & c \\ d & e & f \\ g & h & k \end{bmatrix}$$

then the equivalent set of Bezier points are computed from:

$$\begin{aligned} \begin{bmatrix} a' & b' & c' \\ d' & e' & f' \\ g' & h' & k' \end{bmatrix} &= \begin{bmatrix} \frac{1}{2} & \frac{1}{2} & 0 \\ 0 & 1 & 0 \\ 0 & \frac{1}{2} & \frac{1}{2} \end{bmatrix} \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & k \end{bmatrix} \begin{bmatrix} \frac{1}{2} & 0 & 0 \\ \frac{1}{2} & 1 & \frac{1}{2} \\ 0 & 0 & \frac{1}{2} \end{bmatrix} \\ &= \begin{bmatrix} \frac{a+b+d+e}{4} & \frac{b+e}{2} & \frac{b+c+e+f}{4} \\ \frac{d+e}{2} & e & \frac{e+f}{2} \\ \frac{d+e+g+h}{4} & \frac{e+h}{2} & \frac{e+f+h+k}{4} \end{bmatrix} \dots\dots\dots \text{Equation 1} \end{aligned}$$

Referring again to Figure 6, the region of interest is the central 'square', i.e. a position specified by  $(u,v)$ , where  $0 \leq u,v \leq 1$ . In the case of a bi-quadratic surface, one method based on de Casteljau would be to bi-linearly interpolate sets of 2x2 neighbouring control points, using  $(u,v)$  as weights, to produce a new set of 2x2 intermediate control points. One of the four sets of 2x2 intermediate control points is indicated by '102'. These four results are, in turn, bilinearly interpolated, again using the  $(u,v)$  weights, to produce the surface point. If tangents to the surface are required, a method such as given by Mann and Rose ("Computing values and derivatives of Bezier and B-spline tensor products", CAGD, Vol 12, February 1995) can be used. For the bi-quadratic case, this can be done by performing additional linear interpolations using the 2x2 intermediate control values. Finally, taking the cross product of these tangents generates the surface normal.

The height map defines 'height' values only at certain sample locations and so a means of computing the height surface at other points is required. In particular, bump mapping requires the surface normal which, in turn, usually implies the need for surface tangents. Blinn points out that the surface height is not actually required and proposes a function that only computes tangents. He notes that in order to avoid discontinuities in the shading, his tangent functions are continuous. Using the 3x3 grid of height samples shown in 6, Blinn's function performs 3 bilinear blends respectively of the top left, top right, and bottom left neighbours, and then computes the differences of the top left and top right result and the top left and bottom left result as part of the tangent generation.

Although Blinn's function results in a continuous normal, its derivative can have discontinuities. Unfortunately, the human visual system is very sensitive to changes in the derivative of image intensity, and so 'artefacts' can be seen. The method also tends to emphasise the underlying grid of the height map, which can be seen in Figure 8a. (For the sake of comparison, Figure 8b illustrates the result from a preferred embodiment of the present invention).

Although the introduction of Peercy et al's pre-perturbed normal map method makes bump mapping more practical in real-time hardware, it still requires 'large' texture formats as well as the separate pre-processing step to convert a height map to normal map. The 'large' texture formats consume valuable bandwidth as well as memory and cache storage and, although special normal map compression techniques exist, these formats are still often larger than

the original source height map. Also filtering of the normal map may also be problematic.

A further limitation of Peercy et al's technique is that dynamic bump mapping, i.e. where the bump heights are computed frame-by-frame, is far more difficult to achieve. For example, the height values may be generated as the result of a separate rendering pass. The pre-processing step, including generation of the various MIP map levels, may take too much time to allow real-time rendering.

Finally, it is beneficial to use a height function with C2 (or higher) continuity so that the normal interpolation is C1 (or higher). In particular, it is important to have an inexpensive means of producing this function.

#### **Summary of the Invention**

We have appreciated that it is possible to implement, in hardware, an additional set of functions that provides an efficient means for direct transformation of a height map into filtered perturbed surface normals that have C1 continuity. These normals can subsequently be used for various rendering purposes such as per-pixel lighting. In particular, we have devised a method which, by re-using colour texture filtering hardware that is ubiquitous in today's graphics systems in a new way with the addition of some small processing units, achieves the functions needed to compute the normal from a smooth surface controlled by a set of heights. Thus the data can be generated substantially in real time.

The filtered surface normals are created 'on demand' and are not stored. This provides the joint benefits of reducing the amount of texture data and bandwidth needed for

bump mapping, as well as overcoming some of the issues with the filtering of normal maps. This feature is also important when using dynamic height maps in real-time rendering since a pre-processing step may be prohibitive.

Embodiments of the invention keep the advantages of computing bump map-based shading in local tangent space as described by Peercy et al, (although it is not restricted to doing so), with the convenience of directly using Blinn's height map but with the option of using a function with higher continuity.

Preferred embodiments of the invention will now be described in detail by way of example with reference to the accompanying diagrams in which:

**Figure 1** shows the process of perturbing surface Normals as described by Blinn;

**Figure 2** shows a flow chart of the pipeline used for Peercy et al's method described above;

**Figure 3** shows the relationship of bilinear filtering of a texture to the texels of that texture;

**Figure 4a** shows an overview coordinate calculation device in typical prior art bilinear hardware;

**Figure 4b** shows an overview of prior art hardware that applies the bilinear blending to the addressed texels;

**Figure 5** shows a segment of a piecewise quadratic B-spline curve, or equivalently, a section through a bi-quadratic B-spline Surface;

**Figure 6** shows a plan view of a section of a height map being interpreted as a bi-quadratic B-spline surface;

**Figure 7** shows an overview of a hardware system embodying the invention with modifications to support normal generation from height maps;



Figure 8a shows the results of bumping mapping using Blinn's height map derivative function, while Figure 8b shows the function used by a preferred embodiment; and

Figure 9 shows some alternative filter patterns that could be used for computing derivatives of a bump map.

#### **Detailed Description of Preferred Embodiment**

The preferred embodiment will now be described. Access is provided to height map textures, which store an array of height values, using preferably 4 or 8 bits per texel. Each value will encode a fixed-point number with some number of fraction bits - preferably  $1/4$  of the bits will be assigned to the fractional part.

The embodiment fits a bi-quadratic B-spline through this set of points, thus giving the virtual height map texture C1 continuity (i.e. continuous first derivatives). In Figure 5, the points '80', '81', and '82' represent three adjacent height values/control points in a row of the height map. The value in the texture is allocated (preferably) to the y dimension while the other coordinate values (i.e., x and z) are implicitly defined by the texel's coordinate position. Alternative embodiments may assign these dimensions in some other permutation. The other control points needed for the surface in the texel region are shown, in plan form, in Figure 6.

The manner in which the normal is computed is now described with reference to Figure 7. As with the standard texture filtering system described above, i.e. Figures 4a and 4b, it is assumed that the texture base coordinates to which the texture is to be applied will be calculated and supplied as before, at '50'. Modified address unit '150'

then computes the 'base' texture coordinate, '53', and blend factors '55', in a manner that is similar to the prior art method described with reference to Figure 4a, except that step '51', the typical subtraction of a half-textel dimension, is bypassed when performing height map bump mapping.

A modified texel fetch unit, '151', which in Figure 4b consisted of units '60' thru '63' which obtained four sets of RGBA vectors, is enhanced to be able to fetch a 3x3 set of scalar height values. In particular, it retrieves the following grid of height texels:

$$\begin{bmatrix} (U_i-1, V_j-1) & (U_i, V_j-1) & (U_i+1, V_j-1) \\ (U_i-1, V_j) & (U_i, V_j) & (U_i+1, V_j) \\ (U_i-1, V_j+1) & (U_i, V_j+1) & (U_i+1, V_j+1) \end{bmatrix} = \begin{bmatrix} a & b & c \\ d & e & f \\ g & h & k \end{bmatrix}$$

For brevity, these have been renumbered a, b, etc.

It will be apparent to those skilled in the art that, with application of the address-bit interleaved texture storage format described in our British patent number GB2297886, such a height-map can be packed into the 'equivalent', in terms of storage, of a colour texture of  $\frac{1}{2} \times \frac{1}{2}$  resolution of the height map. Each 2x2 group of scalar height data would occupy the space of a single four-dimensional colour. With such a format, the height map data can then be accessed using a very simple modification of exactly the same fetch mechanism used by units '60' thru '63' in Figure 4a.

The 3x3 grid of samples is then fed into the 'Replicate' unit, 152, which outputs values to the Red, Green, Blue, and Alpha bilinear units. In particular, the

Red channel receives the top left grid of 2x2 scalar values, i.e. those fetched from...

$$\begin{bmatrix} a & b \\ d & e \end{bmatrix}$$

...while similarly the green channel receives the top right set, the blue, the bottom left, and the alpha receives the bottom right. Clearly some values, such as  $b'$  or  $e'$ , will be used more than once, thus the grids supplied to each unit overlap at least partially.

Unit 153 takes the blend factors, '55', and computes new sets of U and V blends as follows:

$$Ublend_0 = \frac{1}{2} + \frac{Ublend}{2}$$

$$Ublend_1 = \frac{Ublend}{2}$$

$$Vblend_0 = \frac{1}{2} + \frac{Vblend}{2}$$

$$Vblend_1 = \frac{Vblend}{2}$$

As Ublend and Vblend are typically fixed point numbers, it should be appreciated that these 'calculations' are completely trivial and incur no cost at all in hardware.

These new blend values are distributed to bilinear units, '65' thru '68' as follows:

Red: (Ublend0, Vblend0)

Green: (Ublend1, Vblend0)

Blue: (Ublend0, Vblend1)

Alpha: (Ublend1, Vblend1)

This manipulation of the blend factors eliminates the need to convert from the quadratic B-spline control points to the Bezier control points, as described previously in

Equation 1. These bilinear units therefore effectively produce data which will enable surface normals with C1 continuity to subsequently be derived.

The results of the 4 bilinear interpolations are fed to the tangent construction unit, 155. This generates two tangent vectors, Tang1 and Tang2, which are functionally equivalent to using the following calculations:

```
Tang1[X] := 1 Texturesize;  
Tang1[Y] := LinearInterpolate(VBlend,  
                                GreenResult - RedResult,  
                                AlphaResult - BlueResult);  
Tang1[Z] := 0;  
Tang2[X] := 0;  
Tang2[Y] := LinearInterpolate(UBlend,  
                                BlueResult - RedResult,  
                                AlphaResult - GreenResult);  
Tang2[Z] := 1 Texturesize
```

...where

```
LinearInterpolate (x, A, B) := A + x*(B-A);
```

For reasons that will soon be apparent, unit 155 actually only outputs three values: Tang1[y], Tang2[y] and 1 Texturesize.

Finally, in unit '156', the cross product of these tangents is computed. It should be noted that if the preferred embodiment is chosen, the presence of zeros in the tangent components simplifies the cross product to the following calculation:

```
N[x] := Tang1[y];  
N[y] := 1 Texturesize  
N[z] := Tang2[y];
```

This vector is then normalised, preferably by squaring the N vector, computing the inverse of the square root of the result, and multiplying that scalar by the original components. The normalisation step may appear expensive, but it would be a requirement of any system that supported compressed normal maps, such as that described in WO9909523 or British patent application No. 0216668.4. Thus, if such texture formats were already supported, the re-normalisation hardware would be reused. An example of the output of this embodiment is shown in Figure 8b.

In an alternative embodiment, trilinear filtering can be adapted to support normal generation - the only difference in procedure will be that the values fed into tangent construction unit '155' will be a 'blend' of the values computed from two adjacent MIP map levels chosen. Other embodiments supporting improved anisotropic filtering are also feasible.

In another embodiment, an interpolated scale factor may be applied to the deltas/tangents before normalisation so that a height map can be scaled differently for different models or different parts of the same model.

In another embodiment, the blend factor adjust unit, 153, is not used and the B-spline control points are converted to the equivalent Bezier representations according to Equation 1 in a modified '152' unit.

In another embodiment, the actual interpolated height value would be computed by including a third linear blending operation.

In another embodiment, Blinn's height interpolation function could be employed. In this embodiment, the blend factor adjust unit, 153, is not used and it is unnecessary to use the bilinear 'alpha' channel. That also implies that it is unnecessary to fetch source texel 'k'. The tangent unit, 155, then simplifies to compute the difference of 'green' and 'red' and the difference of 'blue' and 'red'.

In another alternative embodiment, dedicated sampling hardware could be included that takes numerous texture samples and applies an alternative derivative filter such as 4 taps, Sobel, Prewitt, Parks-McClellan derivatives filters as represented in figure 9.

In another embodiment, colour textures are also filtered using bi-quadratic B-splines, either through the addition of bilinear filtering units, or by iterations through the colour channels, whereby the individual weights to the bilinear units are adjusted according to the previously described embodiments.

## CLAIMS

1. A method for generating bump map data substantially in real time for use in a 3-dimensional computer graphics system comprising the steps of:

receiving data defining an area to which a texture is to be applied;

receiving texture data to apply to the area, the data including surface height data;

filtering each of a set of partially overlapping samples of the texture data;

deriving surface tangent vectors from the filtered samples; and

deriving a bump map surface normal from the surface tangent vectors.

2. A method according to claim 1 in which the tangent vectors are defined in local tangent space.

3. A method according to claim 1 or 2 in which the filtering step includes the step of using bi-quadratic B-splines to model a height surface from the surface height data.

4. A method according to claims 1, 2, or 3 in which the filtering step includes the step of using existing hardware in the colour channels of the 3D graphics system to filter the overlapping samples of texture data.

5. A method according to claim 3 in which the filtering step is modified with blending factors.

6. Apparatus for generating bump map data substantially in real time for use in a 3-dimensional computer graphics system comprising:

means for receiving data defining an area to which a texture is to be applied;

means for receiving texture data to apply to the area, the data including height data;

means for filtering each of a set of partially overlapping samples of the texture data;

means for deriving surface tangent vectors from the filtered samples; and

means for deriving a bump map surface normal from the surface tangent vectors.

7. Apparatus according to claim 6 in which the step of tangent vectors are defined in local tangent space.

8. Apparatus according to claim 6 or 7 in which the filtering means comprises a means to use bi-quadratic B-splines to model height surface from the surface height data.

9. Apparatus according to claims 6, 7, or 8 in which the filtering means includes means to use existing hardware in the colour channels of the 3D graphics system to filter the overlapping samples of texture data.

10. Apparatus according to claim 8 in which the filtering modifies the filtering with blending factors.



11. A 3D graphics system comprising a plurality of colour data processing means for generating data for use in shading an image to be represented by the 3D graphics system;

means for supplying texture data to be applied to the image; and

means for assigning the colour data processing means to the generation of bump map data for use in applying the texture data to the image.

12. A method for generating bump map data substantially in real time for use in a 3-dimensional computer graphics system substantially as herein described.

13. Apparatus for generating bump map data substantially as herein described with reference to figure 7 of the drawings.

14. A method for generating bump map data for use in a 3-dimensional computer graphics system comprising the steps of:

receiving data defining an area to which a texture is to be applied;

receiving texture data to apply to the area, the data including surface height data;

filtering each of a set of partially overlapping samples of the texture data;

deriving surface tangent vectors from the filtered samples; and

deriving a bump map surface normal from the surface tangent vectors.

15. Apparatus for generating bump map data for use in a 3-dimensional computer graphics system comprising:

means for receiving data defining an area to which a texture is to be applied;

means for receiving texture data to apply to the area, the data including height data;

means for filtering each of a set of partially overlapping samples of the texture data;

means for deriving surface tangent vectors from the filtered samples; and

means for deriving a bump map surface normal from the surface tangent vectors.

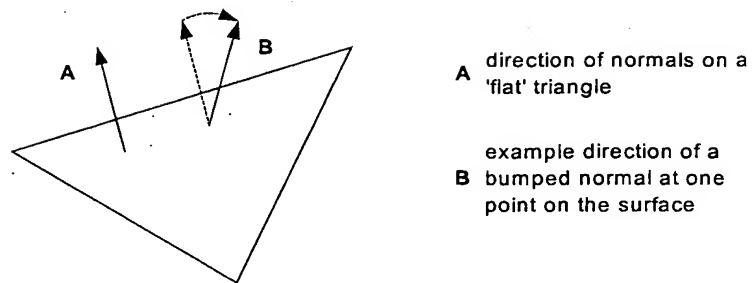


Figure 1

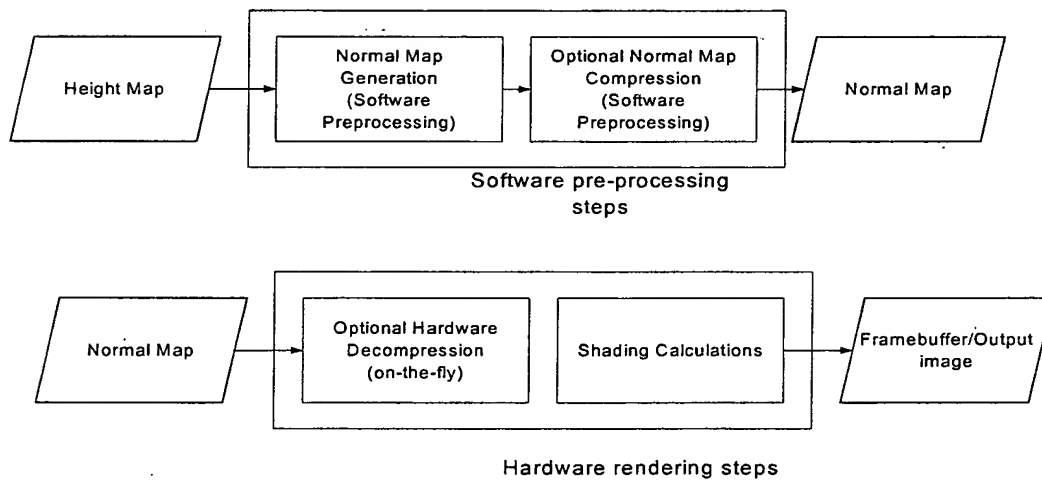


Figure 2



**THIS PAGE BLANK (USPTO)**

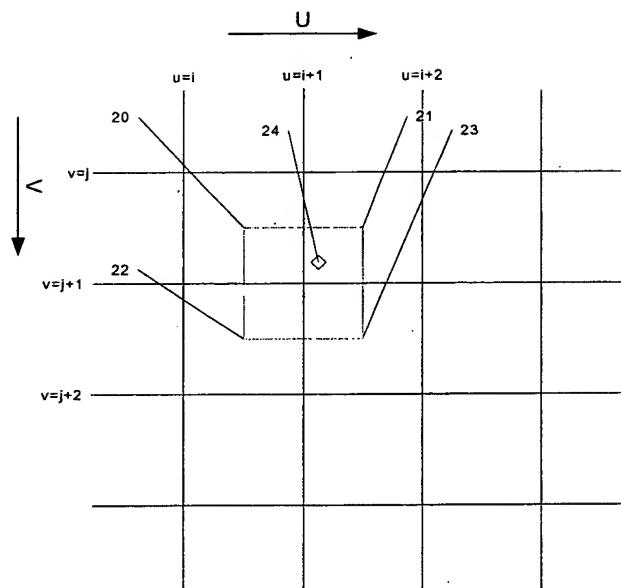


Figure 3

**THIS PAGE BLANK (USPTO)**

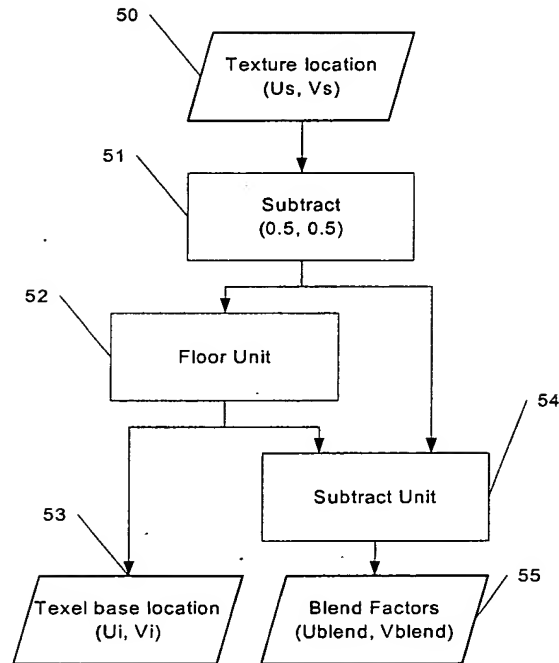


Figure 4a


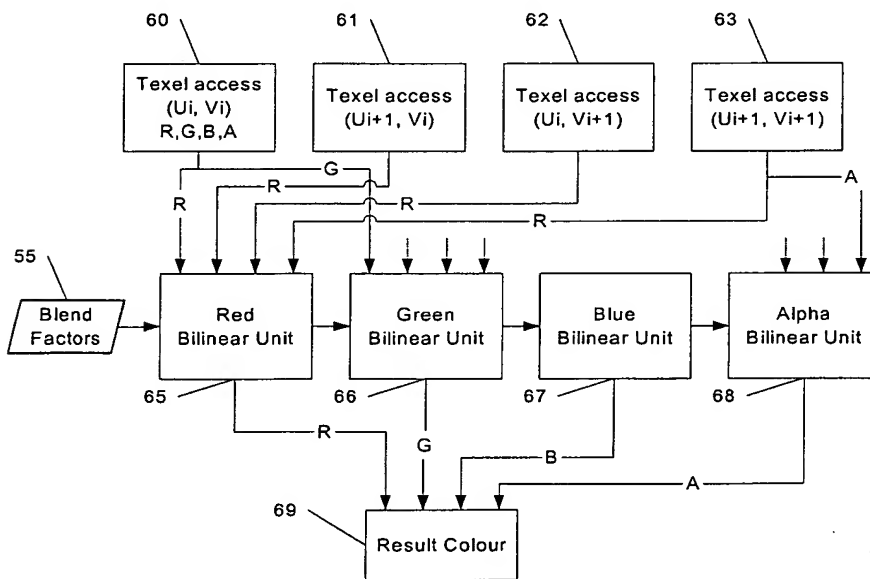



Figure 4b

**THIS PAGE BLANK (USPTO)**



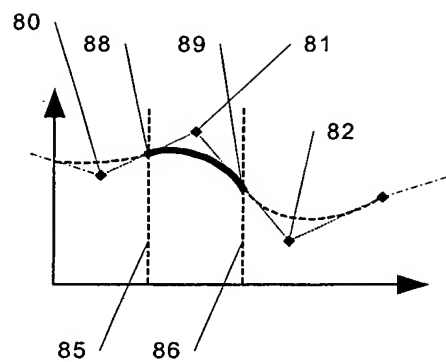

**Figure 5**

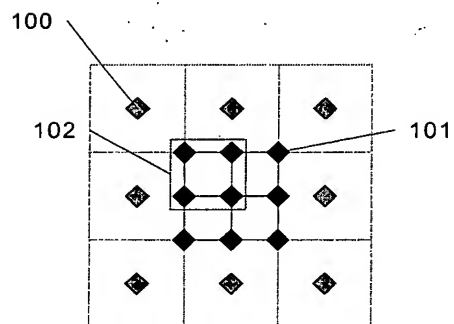

**Figure 6**

**THIS PAGE BLANK (USPTO)**

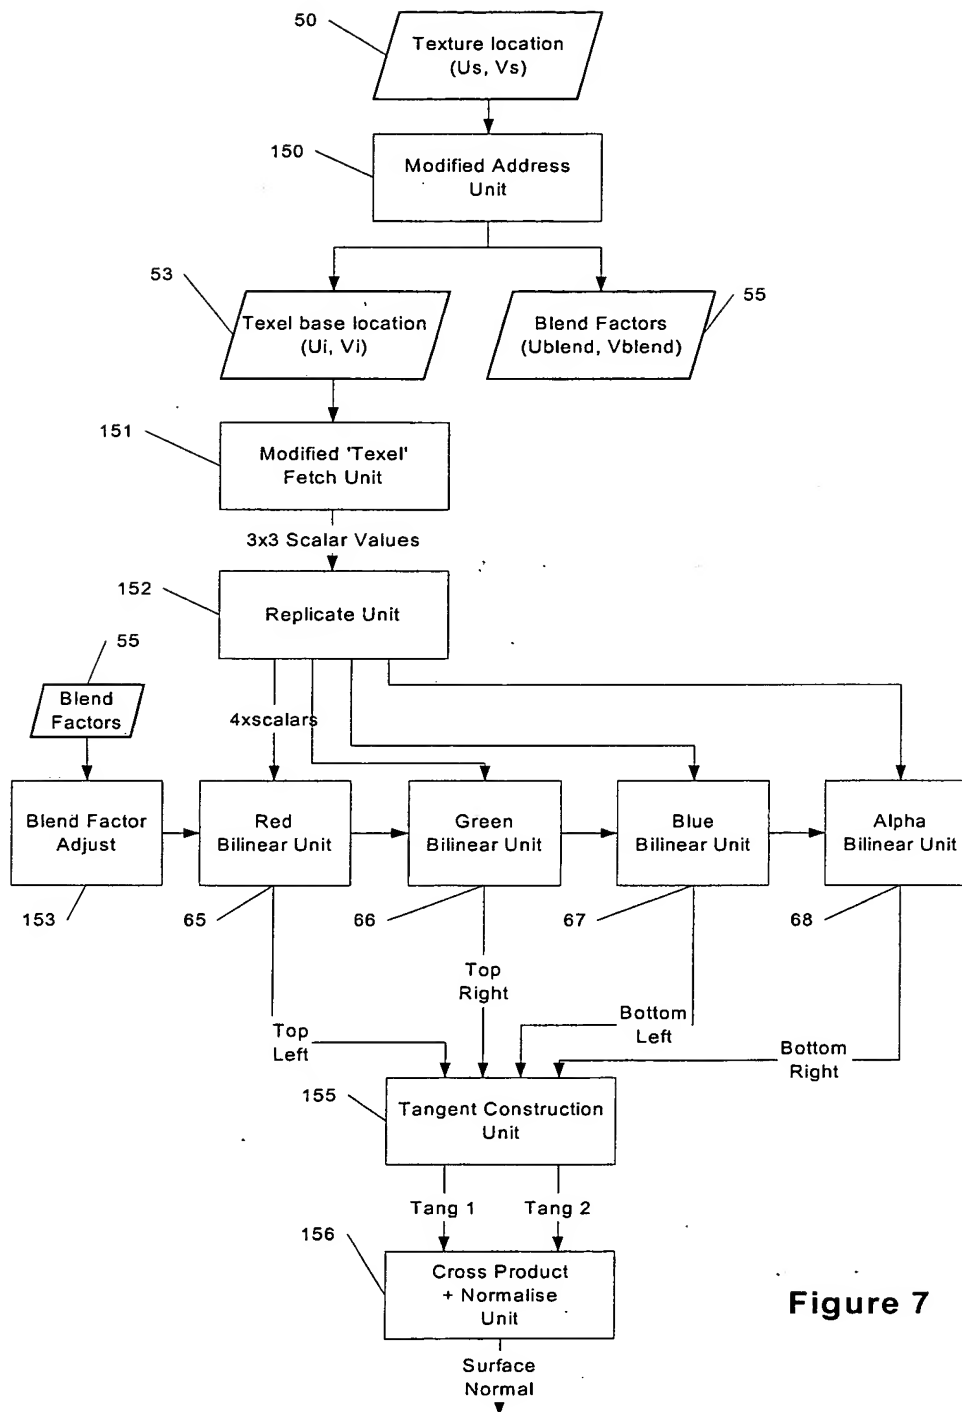


Figure 7

**THIS PAGE BLANK (USPTO)**



Figure 8a



Figure 8b

**THIS PAGE BLANK (USPTO)**

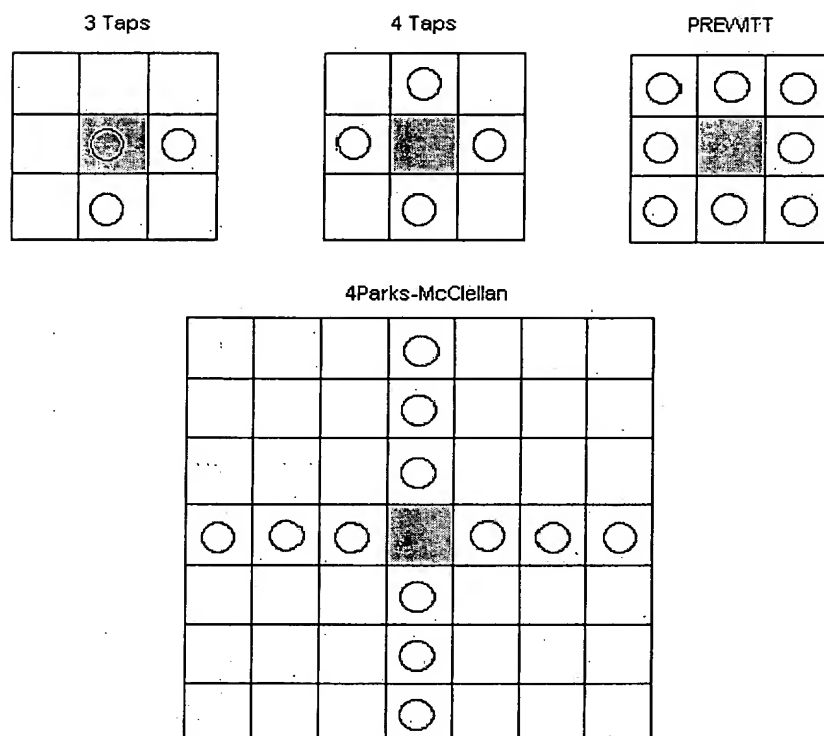


Figure 9

**THIS PAGE BLANK (USPTO)**



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**